



# KuMax

## HIGH EFFICIENCY POLY MODULE

### CS3U-350 | 355 | 360 | 365P

#### (1000 V / 1500 V)

With Canadian Solar's industry leading poly cell technology and the innovative LIC (Low Internal Current) module technology, we are now able to offer our global customers high power poly modules up to 365 W.

The KuMax poly modules with a dimension of 2000 x 992 mm, close to our 72 cell MaxPower modules, have the following features:

#### MORE POWER



Low power loss in cell connection



Low NMOT:  $42 \pm 3$  °C  
Low temperature coefficient (Pmax):  $-0.37$  % / °C



Better shading tolerance



High PTC rating of up to: 92.64 %

#### MORE RELIABLE




Lower hot spot temperature



Minimizes micro-cracks



Heavy snow load up to 5400 Pa,  
wind load up to 2400 Pa

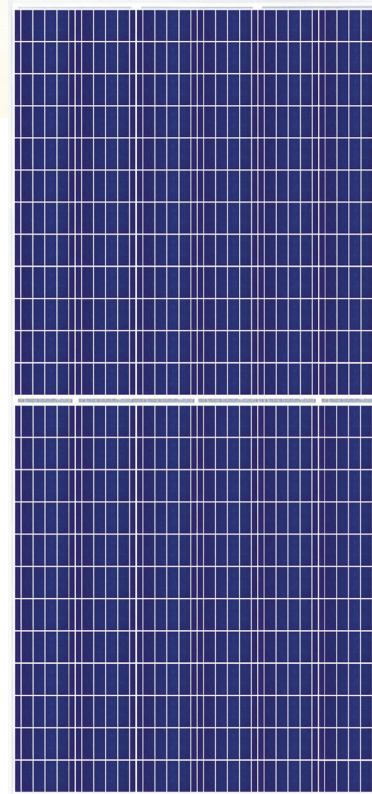

linear power output warranty



product warranty on materials and workmanship

#### MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001:2008 / Quality management system  
ISO 14001:2004 / Standards for environmental management system  
OHSAS 18001:2007 / International standards for occupational health & safety

#### PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730: VDE / CE (Expected in March, 2018)  
UL 1703: CSA (Expected in April, 2018)


\* If you need specific product certificates, and if module installations are to deviate from our guidance specified in our installation manual, please contact your local Canadian Solar sales and technical representatives.

**CANADIAN SOLAR INC.** is committed to providing high quality solar products, solar system solutions and services to customers around the world. As a leading PV project developer and manufacturer of solar modules with over 26 GW deployed around the world since 2001, Canadian Solar Inc. is one of the most bankable solar companies worldwide.


\* For detailed information, please refer to Installation Manual.

## ENGINEERING DRAWING (mm)


### Rear View

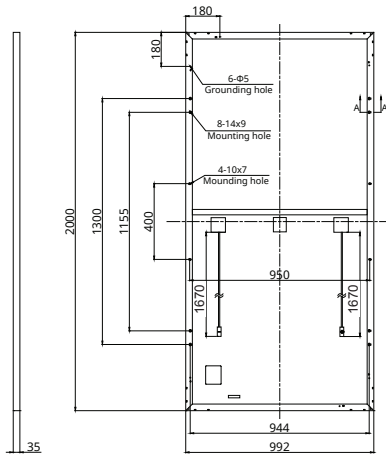


### Frame Cross Section A-A



### Mounting Hole



## CS3U-355P / I-V CURVES

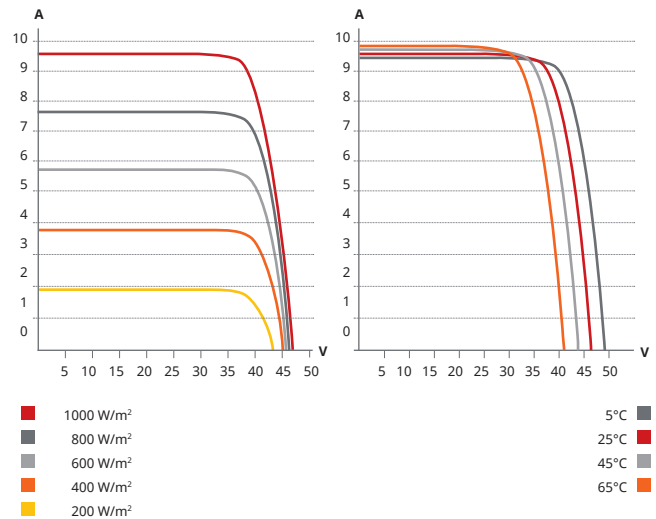

## ELECTRICAL DATA | STC\*

CS3U	350P	355P	360P	365P
Nominal Max. Power (Pmax)	350 W	355 W	360 W	365 W
Opt. Operating Voltage (Vmp)	39.2 V	39.4 V	39.6 V	39.8 V
Opt. Operating Current (Imp)	8.94 A	9.02 A	9.10 A	9.18 A
Open Circuit Voltage (Voc)	46.6 V	46.8 V	47.0 V	47.2 V
Short Circuit Current (Isc)	9.51 A	9.59 A	9.67 A	9.75 A
Module Efficiency	17.64%	17.89%	18.15%	18.40%
Operating Temperature	-40°C ~ +85°C			
Max. System Voltage	1500V (IEC/UL) or 1000V (IEC/UL)			
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)			
Max. Series Fuse Rating	30 A			
Application Classification	Class A			
Power Tolerance	0 ~ + 5 W			

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

## ELECTRICAL DATA | NMOT\*

CS3U	350P	355P	360P	365P
Nominal Max. Power (Pmax)	260 W	264 W	268 W	271 W
Opt. Operating Voltage (Vmp)	36.2 V	36.4 V	36.6 V	36.8 V
Opt. Operating Current (Imp)	7.18 A	7.25 A	7.31 A	7.38 A
Open Circuit Voltage (Voc)	43.7 V	43.9 V	44.1 V	44.3 V
Short Circuit Current (Isc)	7.67 A	7.74 A	7.80 A	7.87 A

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

\* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustment to the information described herein at any time without further notice.

## MECHANICAL DATA

Specification	Data
Cell Type	Poly-crystalline, 156.75 X 78.38 mm
Cell Arrangement	144 [2 X (12 X 6)]
Dimensions	2000 X 992 X 35 mm (78.7 X 39.1 X 1.38 in)
Weight	22.5 kg (49.6 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy, crossbar enhanced
J-Box	IP68, 3 diodes
Cable	4 mm <sup>2</sup> (IEC), 12 AWG (UL)
Cable Length	1670 mm (65.7 in)
Connector	T4 series
Per Pallet	30 pieces
Per Container (40' HQ)	660 pieces

## TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.37 % / °C
Temperature Coefficient (Voc)	-0.29 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	42 ± 3°C

## PARTNER SECTION

